

People Counting Camera for Establishments



QH- CP040H

Key Features

- Dual Lens People Counting Camera
- QH-CP040H is a high cost-effective and expandable equipment specially developed for Shop Passenger Counter. It uses high-speed processor and embedded operating system.
- The product can be used in Shops, supermarket, shopping malls, building channels and other places where passenger flow needs to be counted. It can be easily installed in doors, roofs, walls, ceilings and other places to accurately count the number of passengers passing. Industrial level design, special vehicle interface, to ensure reliable and stable operation of products in complex environment.
- Professional and stable special file system
- +12V ~ 36V Wide voltage design, suitable for various models
- Support 2 alarm inputs
- Good expansibility, supporting RS485 protocol docking

Tel: 0086-755-88832758 **Fax:** 0086-755-61624570 **Website:** www.qohovisions.com
Email: sales@qohocctv.com **Skype:** qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street,
Baoan district,Shenzhen city, Guangdong province, China.





Specifications

Model	QH-CP040H
Material	Aluminum
System parameter	
Main chip parameters	CPU-Cortex A7 4-core frequency 1.2G or above
GPU parameters	Dual-core GPU rendering
Storage NANDFLASH	256MB nandflash
High-speed memory	DDR3-256MB
Operating system platform	Linux3.10
TF card interface type	Micro-SDHC/256MB-32GB Class2/4/6/10 compatible
Operation language	Chinese, English, Spanish
Operation GUI	C/S operation configuration mode
Operation method	Web
Graphic operation interface	Various parameters of the system can be set by display screen and remote control
Language	English, Chinese, Turkish, Spanish, French, Italian, Russian, German, Romanian, Arabic, Japanese
Image and video	
Image Sensor	1/3CMOS
Video format	PAL, NTSC system (optional)
Horizontal Resolution	700 TV Lines
Preview function	Single channel, 2 pictures splicing;
Video output	1 video output (CVBS)
OSD	Time and date passenger flow information and other information images are superimposed
Compression format	H.264
Lens parameters	960*576 pixels, 2.8mm (2.8mm/3.6mm/4mm/6mm optional)
Resolution	CIF D1

Tel: 0086-755-88832758 **Fax:** 0086-755-61624570 **Website:** www.qohovisions.com



Email: sales@qohocctv.com **Skype:** qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street, Baoan district,Shenzhen city, Guangdong province, China.





Input	2 alarm IO inputs, configurable low-level alarm below 1V or high-level alarm above 5V
Alarm	Video loss, video occlusion, over-alarm alarm
RS485 interface	1 RS485 interface, support protocol docking and protocol custom development
RJ45	1 RJ45 interface, can be used for testing, copying, setting, recording, upgrading, transmission, etc.
≥5V Power ON	
The output voltage	+12V@0.5A
Power consumption	Normal working state <4W
Video standard	PAL, NTSC system (optional)
Resolution	CIF D1
working environment	temperature: -20°C~70°C humidity: 10%~90% (non-condensing)
Heat dissipation	No active heat dissipation, passive structure heat dissipation
size	194X62X66mm
Total Weight	About 0.45KG
Statistical accuracy	≥95%

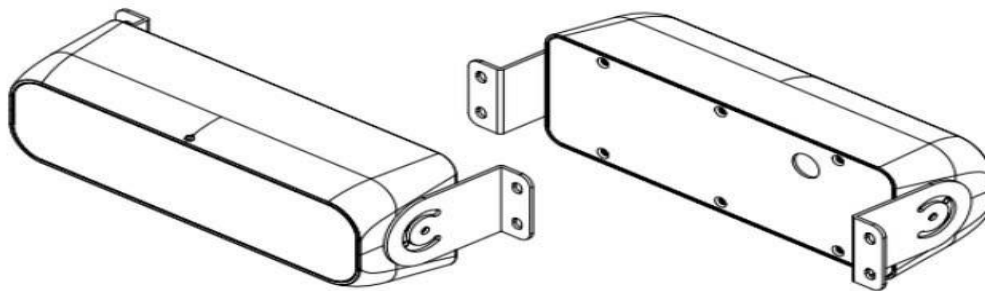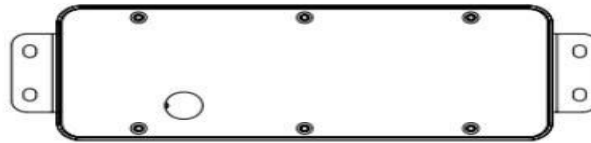

Tel: 0086-755-88832758 Fax: 0086-755-61624570 Website: www.qohovisions.com
 Email: sales@qohocctv.com Skype: qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street,
 Baoan district,Shenzhen city, Guangdong province, China.





This Product can work with:

4ch 1080P single SD card MDVR	4ch Dual Micro-SD card Car DVR	8ch 720P HDD Mobile DVR	4ch 1080P Dual SD card Mobile DVR
			

Tel: 0086-755-88832758 **Fax:** 0086-755-61624570 **Website:** www.qohovisions.com
Email: sales@qohocctv.com **Skype:** qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street,
Baoan district,Shenzhen city, Guangdong province, China.

